

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
22 March 2001 (22.03.2001)

PCT

(10) International Publication Number
WO 01/20568 A1

(51) International Patent Classification⁷: G08B 13/24

(21) International Application Number: PCT/IL00/00548

(22) International Filing Date:
8 September 2000 (08.09.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
131866 10 September 1999 (10.09.1999) IL

(71) Applicant (for all designated States except US): AD-
VANCED CODING SYSTEMS LTD. [IL/IL]; P.O. Box
2903, 40500 Even Yehuda (IL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): ANTONENCO,
Alexandru [MD/MD]; Cupcea Street 15 V., 2009
Kishinev (MD). BROOK-LEVINSON, Edward [IL/IL];

Hana Senesh Street 5, 49507 Petah Tikva (IL). MANOV,
Vladimir [IL/IL]; Jores Street 6A/19, Haifa 35706, 35706
Haifa (IL). SORKINE, Evgeni [IL/IL]; Einstein Street
31/4, Tel Aviv, 69101 Tel Aviv (IL). TARAKANOV, Yuri
[IL/IL]; Rav Kaniel Street 11/122, 33199 Haifa (IL).


(74) Agent: REINHOLD COHN AND PARTNERS; P.O.
Box 4060, 61040 Tel-Aviv (IL).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,
TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG,
CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: A GLASS-COATED AMORPHOUS MAGNETIC MICROWIRE MARKER FOR ARTICLE SURVEILLANCE

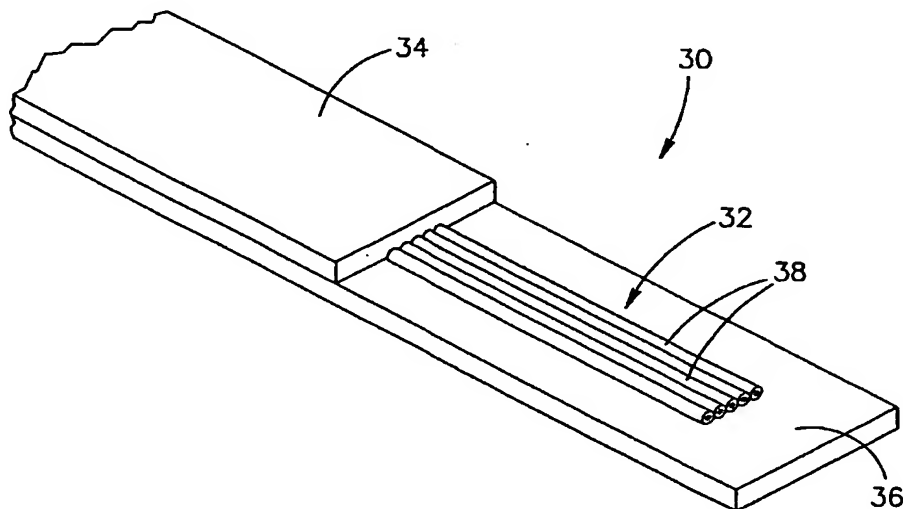

(57) Abstract: A magnetic marker for use in an article surveillance system, and an electronic article surveillance system utilizing the same are presented. The marker comprises a magnetic element formed by at least one microwire piece made of an amorphous metal-containing material coated with glass. The microwire piece has substantially zero magnetostriction, coercivity substantially less than 10A/m, and permeability substantially higher than 20000.

WO 01/20568 A1

WO 01/20568 A1



Published:

- *With international search report.*
- *Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

A GLASS-COATED AMORPHOUS MAGNETIC MICROWIRE MARKER FOR ARTICLE SURVEILLANCE

FIELD OF THE INVENTION

The present invention is in the field of article surveillance techniques and relates to a magnetic marker for use in an electronic article surveillance system (EAS).

5 BACKGROUND OF THE INVENTION

Magnetic markers are widely used in EAS systems, due to their property to provide a unique non-linear response to an interrogating magnetic field created in a surveillance zone. The most popularly used markers utilize a magnetic element made of soft magnetic amorphous alloy ribbons, which is typically shaped like an elongated strip. A marker of this kind is disclosed, for example, in U.S. Patent No. 10 4,484,184. This strip-like marker usually is of several centimeters in length and a few millimeters (or even less than a millimeter) in width.

It is a common goal of marker designing techniques to decrease the marker dimensions and to enhance the uniqueness of its response. Additionally, it is 15 desirable to increase the marker flexibility so as to enable its attachment to various flexible and flat articles like clothes, footwear, etc. in a concealed manner. For these purposes, a magnetic element in the form of a thin wire is preferable over that of a strip.

- 2 -

U.S. Patent No. 5,801,630 discloses a method for preparing a magnetic material with a highly specific magnetic signature, namely with a magnetic hysteresis loop having large Barkhausen discontinuity at low coercivity values, and a marker utilizing a magnetic element made of this material. The material is prepared from a negative-magnetostrictive metal alloy by casting an amorphous metal wire, processing the wire to form longitudinal compressive stress in the wire, and annealing the processed wire to relieve some of the longitudinal compressive stress. However, a relatively large diameter of the so-obtained wire (approximately 50 μ m) impedes its use in EAS applications. Additionally, a complicated multi-stage process is used in the manufacture of this wire. Furthermore, amorphous wire brittleness unavoidably occurs, due to the wire-annealing process. Such brittleness will prevent the use of the wire in flexible markers.

A technique for manufacturing microwires known as Taylor-wire method enables to produce microwires having very small diameters ranging from one micrometer to several tens micrometers by a single-stage process consisting of a direct cast of a material from melt. Microwires produced by this technique may be made from a variety of magnetic and non-magnetic alloys and pure metals. This technique is disclosed, for example, in the article "*The Preparation, Properties and Applications of Some Glass Coated Metal Filaments Prepared by the Taylor-Wire Process*", W. Donald et al., Journal of Materials Science, 31, 1996, pp. 1139-1148.

The most important feature of the Taylor-wire process is that it enables to produce metals and alloys in the form of a glass-coated microwire in a single operation, thus offering an intrinsically inexpensive way for the microwire manufacture.

A technique of manufacturing magnetic glass-coated microwires with an amorphous metal structure is described, for example, in the article of "*Magnetic Properties of Amorphous Fe-P Alloys Containing Ga, Ge, and As*", H. Wiesner and J. Schneider, Phys. Stat. Sol. (a) 26, 71 (1974).

The properties of amorphous magnetic glass-coated microwires are described in the article "High Frequency Properties of Glass-Coated Microwires",

- 3 -

A.N. Antonenko et al, Journal of Applied Physics, vol. 83, pp. 6587-6589. The microwires cast from alloys with small negative magnetostriction demonstrate flat hysteresis loops with zero coercivity and excellent high frequency properties. The microwires cast from alloys with positive magnetostriction are characterized by
5 ideal square hysteresis loops corresponding to their single-domain structure.

SUMMARY OF THE INVENTION

There is accordingly a need in the art to facilitate the article surveillance by providing a novel magnetic marker to be used in EAS system.

It is a major feature of the present invention to provide such a marker that
10 has minimum dimensions, while maintaining the necessary level of response to an interrogating magnetic field.

It is a further feature of the present invention that the marker has highly unique response characteristics.

It is a still further feature of the present invention that the marker is
15 extremely flexible, and can therefore be introduced to articles made of fabrics and having a complex shape.

The main idea of the present invention is based on the use of amorphous metal glass-coated magnetic microwires with substantially zero magnetostriction, very low coercivity (substantially less than 10A/m) and high permeability
20 (substantially higher than 20000) to form a magnetic element of a marker. The present invention takes advantage of the use of the known Tailor-wire method for manufacturing these amorphous glass-coated magnetic microwires from materials enabling to obtain the zero magnetostriction.

Although amorphous magnetic glass-coated microwires and their
25 manufacture have been known for a long time, no attempts were made for using them in magnetic elements of EAS markers. These amorphous magnetic glass-coated microwires, however, have good mechanical strength, flexibility, and corrosion resistance, and can therefore be easily incorporated in paper, plastic, fabrics and other article materials.

- 4 -

There is thus provided according to one aspect of the present invention, a magnetic marker for use in electronic article surveillance (EAS) system, the marker comprising a magnetic element formed by at least one microwire piece made of an amorphous metal-containing material coated with glass, the microwire piece having
5 substantially zero magnetostriction, coercivity substantially less than 10A/m and permeability substantially higher than 20000.

Preferably, the microwire piece is manufactured by a single-stage process of direct cast from melt (i.e., Tailor-wire method). The microwire (its metal core) has a desirably small diameter, (e.g., several micrometers) substantially not exceeding
10 30 μ m. The properties of the microwire piece are controlled by varying the metal-containing material composition and the glass-to-metal diameter ratio.

The microwire piece comprises a core, made of the metal-containing material, and the glass coating. The metal core and the glass coating may be either in continuous contact or may have only several spatially separated points of
15 contact.

Preferably, the metal containing material is a cobalt-based alloy. For example Co-Fe-Si-B alloy (e.g., containing 77.5% Co, 4.5% Fe, 12% Si, and 6% B by atomic percentage), Co-Fe-Si-B-Cr alloy (e.g., containing 68.7% Co, 3.8% Fe, 12.3% Si, 11.4% B, and 3.8% Cr by atomic percentage), or Co-Fe-Si-B-Cr-Mo
20 alloy (e.g., containing 68.6% Co, 4.2% Fe, 12.6% Si, 11% B, 3.52% Cr and 0.08% Mo by atomic percentage) may be used. The microwire piece made of the Co-Fe-Si-B-Cr-Mo alloy shows less sensitivity to external mechanical tensions, due to the fact that in this microwire the metal core and glass coating are physically attached to each other only in several spatially separated points of contact, rather
25 than being in continuous contact.

According to one embodiment of the invention, the marker is in the form of a strip, formed by several parallel microwire pieces enclosed between substrate and cover layers. The substrate and cover layers are, preferably, manufactured by a co-extrusion process.

- 5 -

According to another embodiment of the invention, the magnetic element is in the form of a plurality of the microwire pieces twisted in a thread, and optionally comprises auxiliary non-magnetic reinforcement fibers. Preferably, the thread is soaked with an elastic binder.

5 According to yet another embodiment of the invention, the magnetic element is formed by a plurality of the microwire pieces aligned in a bundle and assembled in a thread by winding non-magnetic auxiliary fibers. The auxiliary fibers may either partly or entirely cover the outer surface of the bundle.

According to another aspect of the present invention, there is provided an
10 electronic article surveillance system utilizing a marker mounted within an article to be detected by the system when entering an interrogation zone, the system comprising a frequency generator coupled to a coil for producing an alternating magnetic field within said interrogation zone, a magnetic field receiving coil, a signal processing unit and an alarm device, wherein said marker comprises a
15 magnetic element formed by at least one microwire piece made of an amorphous metal-containing material coated with glass, the microwire piece having substantially zero magnetostriction, coercivity substantially less than 10A/m and permeability substantially higher than 20000.

BRIEF DESCRIPTION OF THE DRAWINGS

20 In order to understand the invention and to see how it may be carried out in practice, a preferred embodiment will now be described, by way of non-limiting example only, with reference to the accompanying drawings, in which:

Fig. 1 is a schematic block diagram of a conventional EAS system;

Fig. 2 schematically illustrates a magnetic marker constructed according to
25 one embodiment of the invention;

Fig. 3 graphically illustrates the main characteristic of the marker's magnetic element;

Fig. 4 is a schematic illustration of a magnetic marker constructed according to another embodiment of the invention;

- 6 -

Fig. 5 is a schematic illustration of yet another embodiments of the invention; and

Fig. 6 illustrates more specifically some constructional principles of the microwire piece suitable to be used in the marker of either of Figs. 2, 4 or 5.

5 DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT

Referring to Fig. 1, a block diagram of the main components typically included in an EAS system 10 is illustrated. The system 10 comprises a frequency generator block 12 and a coil 14 producing an alternating magnetic field within an interrogation zone Z_{in} . Further provided in the system 10 are the following
10 elements: a field receiving coil 16, a signal processing unit 18 and an alarm device 20.

The system 10 operates in the following manner. When an article carrying a magnetic marker M enters the interrogation zone Z_{in} , the non-linear response of the marker to the interrogating field produces perturbations to the signal received by
15 the field receiving coil 16. These perturbations, which may for example be higher harmonics of the interrogation field signal, are detected by the signal processing unit 18, which generates an output signal that activates the alarm device 20.

Reference is now made to Fig. 2, illustrating a marker 30 constructed according to one embodiment of the present invention suitable to be used in the
20 system 10. The marker 30 includes a magnetic element 32 sandwiched between a substrate layer 34 and a cover layer 36. The magnetic element 32 is formed by several parallel magnetic amorphous glass-coated microwire pieces, generally at 38. It should, however, be noted that a single microwire piece, as well as any other suitable number of microwire pieces, could be used. Generally, the number of such
25 microwire pieces is dictated by the requirements of the specific application, namely the required sensitivity of EAS system and the length of the marker's magnetic element. It is known that the longer the magnetic element of the marker, the less the sensitivity value of the system, which is sufficient for the detection of the marker-associated article.

- 7 -

The outer surface of the substrate 34 may be formed with a suitable adhesive coating to secure the marker 30 to an article (not shown) which is to be monitored. A barcode label or the like may be printed on the outer surface of the cover layer 36.

5 The substrate and cover layers 34 and 36 may be manufactured by the known co-extrusion process. This enables to produce the marker 30 with the width of few tenths of millimeters, which is very convenient for hiding it inside the article to be maintained under surveillance. As for the glass-coated magnetic microwire piece 38, it is manufactured by utilizing a direct cast from the melt technique,
10 known as Taylor-wire method. The so-prepared glass-coated magnetic microwire piece 18 is characterized by small coercivity (substantially less than 10A/m) and high permeability values (substantially higher than 20000).

 The inventors have found that such a microwire can be manufactured from amorphous alloys having zero magnetostriction. The hysteresis loops of this
15 microwire may be similar to that of die-drawn amorphous wires disclosed in the above US Patent No. 5,801,630. However; according to the principles of the present invention, no additional processing is needed after the microwire casting. The microwire properties can be controlled by varying the alloy composition and the glass-to-metal diameter ratio.

20 Following are three examples of the microwire piece manufactured according to the invention and tested:

 (1) The microwire is made of an alloy containing 77.5% Co, 4.5% Fe, 12% Si, and 6% B by atomic percentage. Fig. 3 illustrates a hysteresis loop H measured in such a microwire sample. In the present example, the diameter of the inner metal
25 part (core) is about 15-20 μ m. The total diameter of the microwire sample (inner metal part and the glass coating) is about 17-22 μ m. As shown, the hysteresis loop H has a small coercivity value, namely less than 10A/m, and large Barkhausen discontinuity, that is, a high permeability value (higher than 20000).

 (2) The microwire is made of Co-Fe-Si-B-Cr alloy containing 68.7% Co,
30 3.8% Fe, 12.3% Si, 11.4% B, and 3.8% Cr by atomic percentage.

- 8 -

(3) The microwire is made of Co-Fe-Si-B-Cr-Mo alloy containing 68.6% Co, 4.2% Fe, 12.6% Si, 11% B, 3.52% Cr and 0.08% Mo by atomic percentage. Some important features of this microwire will be described further below with reference to Fig. 6.

5 Other microwire samples were tested by the inventors, the samples being manufactured from the Co-Fe-Si-B alloys generally similar to the above composition, but with small variations of the contents of iron, i.e. within $\pm 0.05\%$. The outer diameter of the microwire was about 22-25 μm , and the diameter of its metal core was about 16-20 μm . The shapes of the measured hysteresis curves of
10 the microwire samples were similar to that shown in Fig. 3. The coercive force values were about 2-10A/m (0.03-0.12Oe).

Fig. 4 illustrates a magnetic marker 40 constructed according to another embodiment of the invention. In the marker 40, a magnetic element is in the form of a plurality of microwire pieces 42 twisted in a thread. Such a thread may be
15 manufactured by the known textile methods, and may utilize non-magnetic reinforcement fibers 44 (e.g., polyester fibers). To improve the mechanical performance of the marker, the thread may be soaked with an appropriate elastic binder.

It should be noted that such a thread-like magnetic element may be
20 manufactured by arranging a plurality of non-magnetic reinforcement fibers to form a conventional sewing thread, the magnetic glass coated microwires being concealed in the plurality of fibers. This design is convenient for embedding the magnetic markers in the articles made of fabrics, e.g., clothing.

Fig. 5 illustrates yet another embodiment of the present invention. A
25 thread-shaped magnetic marker 50 comprises a bundle of parallel, untwisted microwire pieces 52 that are assembled in a thread by winding auxiliary non-magnetic fibers 54 around the bundle. In this example, the auxiliary fibers 34 only partly cover the external surface of the marker 52. It should however be noted that the auxiliary fibers 54 could cover the entire external surface of the marker, so

- 9 -

that it will look like a usual sewing thread which is advantageous for embedding the marker in articles made of fabrics.

It should also be noted that the mechanical performance of the marker can be improved by additionally coating the microwire pieces with plastic polymer materials, such as polyester, Nylon, etc. The coating may be applied to separate microwires and/or to entire microwire bundle.

Fig. 6 illustrates a microwire 60 to be used in either of the markers 20, 30 or 50. The microwire 60 is composed of a metal core 62 and a glass coating 64, wherein the metal core and the glass coating are physically coupled to each other solely in several spatially separated points - one point 66 being seen in the figure. In other words a certain gap 68 is provided between the core and the coating all along the microwire except for several points of contact.

As known, the microwire core metal may have continuous contact with the glass coat. In this case, the differences in thermal elongation of glass and metal result in considerable stresses created in the metal core 62. As disclosed in the above article by A.N. Antonenko et al., these stresses considerably affect the magnetic properties of the microwire. Additionally, the microwire is sensitive to external stresses created by its bending or twisting, which is undesirable for the purposes of the present invention, i.e., for use of the microwire in markers. It has been found by the inventors, that by controlling the conditions of a casting process, and by varying the metal alloy composition, it becomes possible to produce microwire with separate points of contact between the metal core and the glass coating, rather than being in continuous contact. Particularly, the Co-Fe-Si-B-Cr-Mo alloy of the above example (3) was used for manufacturing the microwire 60. Microscopic analysis of the produced microwire have shown that the small gap between the metal core and glass coating take place all along the microwire except for several spatially separated points of contact. The microwire of this construction possesses less sensitivity to external mechanical tensions, as compared to that of continuous physical contact between the metal core and glass coating.

- 10 -

The advantages of the present invention are self-evident. The use of amorphous glass coated microwires prepared from a magnetic material with substantially zero magnetostriction, very low coercivity and high permeability as the magnetic element of an EAS marker, enables to produce a desirably miniature
5 and flexible marker suitable to be attached and/or hidden in a delicate article to be monitored. Moreover, the use of the Tailor-wire method for manufacturing such microwires significantly simplifies the manufacture and provides for desirably small thickness of the microwire.

The markers according to the present invention may be deactivated by the
10 known methods, for example, those disclosed in the above-indicated U.S. Patent No. 4,484,184, or by crystallizing some or all of the microwire metal cores by suitable microwave radiation.

Those skilled in the art will readily appreciate that various modifications and changes can be applied to the preferred embodiment of the present invention as
15 hereinbefore exemplified, without departing from its scope defined in and by the appended claims.

CLAIMS:



1. A magnetic marker for use in an article surveillance system, the marker comprising a magnetic element formed by at least one microwire piece made of an
5 amorphous metal-containing material coated with glass, the microwire piece having substantially zero magnetostriction, coercivity substantially less than 10A/m, and permeability substantially higher than 20000.
2. The marker according to Claim 1, wherein said at least one microwire piece is manufactured by a single-stage process of direct cast from melt
- 10 3. The method according to Claim 2, wherein said at least one microwire piece comprises a core, made of said metal-containing material, and the glass coating, the diameter of the core substantially not exceeding 30 μ m.
4. The marker according to Claim 1, wherein said at least one microwire piece comprises a core, made of said metal-containing material, and the glass
15 coating, wherein the metal core and the glass coating are physically coupled to each other in several spatially separated points.
5. The marker according to Claim 2, wherein the properties of said at least one microwire piece are controlled by varying the metal-containing material composition and the glass-to-metal diameter ratio.
- 20 6. The marker according to Claim 1, wherein said metal containing material is a cobalt-based alloy.
7. The marker according to Claim 6, wherein said cobalt-based alloy is an alloy of Co, Fe, Si and B.
8. The marker according to Claim 7, wherein said cobalt-based alloy contains
25 77.5% Co, 4.5% Fe, 12% Si, and 6% B by atomic percentage.
9. The marker according to Claim 6, wherein said cobalt-based alloy is an alloy of Co, Fe, Si, B and Cr.
10. The marker according to Claim 9, wherein said cobalt-based alloy contains 68.7% Co, 3.8% Fe, 12.3% Si, 11.4% B, and 3.8% Cr by atomic percentage.

- 12 -

11. The marker according to Claim 6, wherein said cobalt-based alloy is an alloy of Co, Fe, Si, B, Cr and Mo.
12. The marker according to Claim 11, wherein said cobalt-based contains 68.6% Co, 4.2% Fe, 12.6% Si, 11% B, 3.52% Cr and 0.08% Mo by atomic
5 percentage.
13. The marker according to Claim 1, wherein said at least one microwire piece is accommodated between substrate and cover layers.
14. The marker according to Claim 13, wherein a desired number of the microwire pieces are accommodated between said substrate and cover layers, the
10 microwire pieces being aligned in a parallel relationship so as to form a strip.
15. The marker according to Claim 13, where said substrate and cover layers are manufactured by a co-extrusion process.
16. The marker according to Claim 1, wherein the magnetic element is in the form of a plurality of the microwire pieces twisted in a thread.
- 15 17. The marker according to Claim 16, wherein said magnetic element comprises auxiliary non-magnetic reinforcement fibers.
18. The marker according to Claim 16, wherein said thread is soaked with an elastic binder.
19. The marker according to Claim 1, wherein said magnetic element is
20 formed by a plurality of the microwire pieces aligned in a bundle and assembled in a thread by winding non-magnetic auxiliary fibers.
20. The marker according to Claim 19, wherein auxiliary fibers cover the entire outer surface of the bundle.
21. The marker according to Claim 19, wherein auxiliary fibers partly cover
25 the outer surface of the bundle.
22. An electronic article surveillance system utilizing a marker mounted within an article to be detected by the system when entering an interrogation zone, the system comprising a frequency generator coupled to a coil for producing an alternating magnetic field within said interrogation zone, a magnetic field receiving
30 coil, a signal processing unit, and an alarm device, wherein said marker comprises a

– 13 –

magnetic element formed by at least one microwire piece made of an amorphous metal-containing material coated with glass, the microwire piece having substantially zero magnetostriction, coercivity substantially less than 10A/m and permeability substantially higher than 20000.

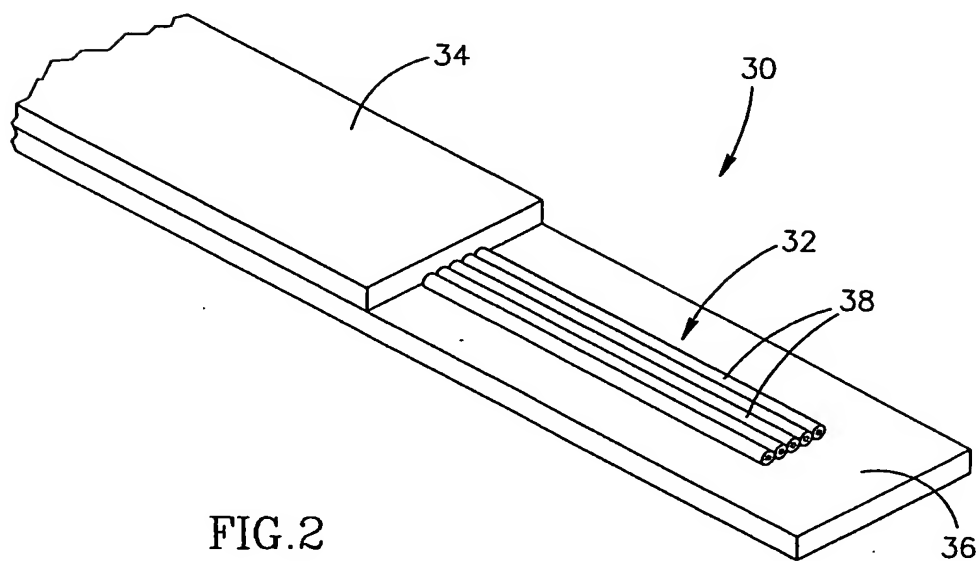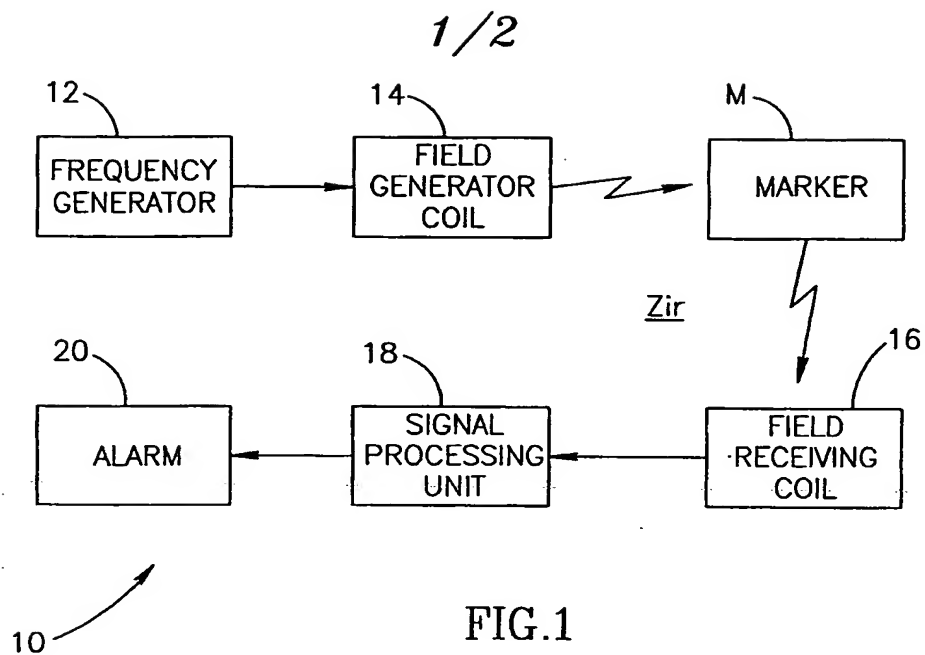

2/2

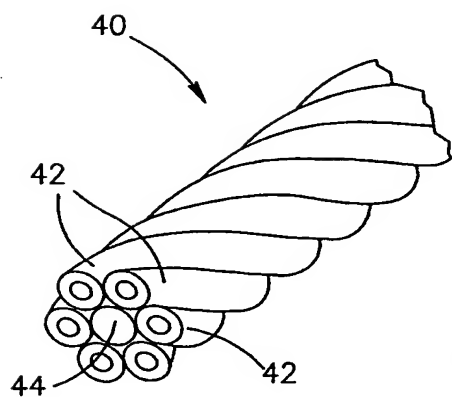
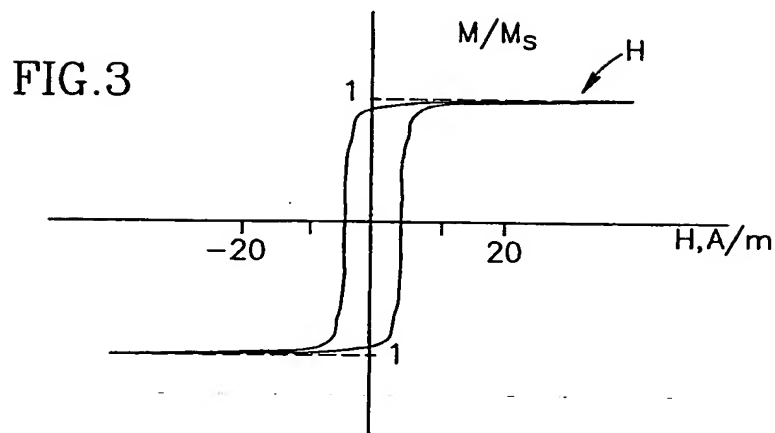


FIG.4

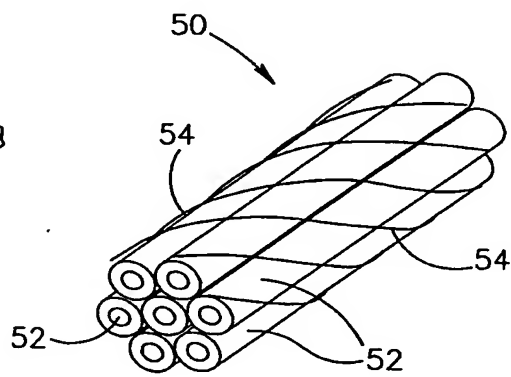


FIG.5

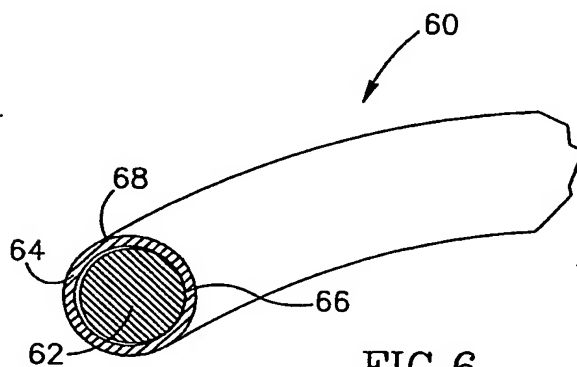


FIG.6

INTERNATIONAL SEARCH REPORT

International Application No

PCT/IL 00/00548

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G08B13/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G08B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 98 20467 A (SENSORMATIC ELECTRONICS CORP) 14 May 1998 (1998-05-14) cited in the application abstract	1-22
A	EP 0 316 811 A (HITACHI METALS LTD) 24 May 1989 (1989-05-24) abstract	1-22
A	US 5 519 379 A (HO WING ET AL) 21 May 1996 (1996-05-21) abstract	1-22
	-/-	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

21 December 2000

Date of mailing of the international search report

22/01/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Sgura, S

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IL 00/00548

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>ANTONENKO A N ET AL: "HIGH FREQUENCY PROPERTIES OF GLASS-COATED MICROWIRE" JOURNAL OF APPLIED PHYSICS,US,AMERICAN INSTITUTE OF PHYSICS. NEW YORK, vol. 83, no. 11, PART 02, 1 June 1998 (1998-06-01), pages 6587-6589, XP000777183 ISSN: 0021-8979 cited in the application the whole document</p>	1-22
A	<p>I.W. DONALD, B.L.METCALFE: "the preparation, properties and applications of some glass-coated metal filaments prepared by the Taylor wire process" JOURNAL OF MATERIALS SCIENCE, vol. 31, 1996, pages 1139-1149, XP000971232 cited in the application the whole document</p>	1-22
A	<p>H. WIESNER, J. SCHNEIDER : "magnetic properties of amorphous Fe-P alloys containing Ga, Ge, and As" PHYSICA STATUS SOLIDI, vol. 26, no. 71, 1974, pages 71-75, XP000974593 dresden cited in the application the whole document</p>	1-22

INTERNATIONAL SEARCH REPORT

Information on patent family members

Intern. Application No

PCT/IL 00/00548

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9820467 A	14-05-1998	US 5801630 A	01-09-1998
		AU 718853 B	20-04-2000
		AU 4262897 A	29-05-1998
		BR 9713337 A	09-05-2000
		EP 0937293 A	25-08-1999
EP 0316811 A	24-05-1989	JP 1131995 A	24-05-1989
		JP 2713711 B	16-02-1998
		CA 1312809 A	19-01-1993
		DE 3855778 D	13-03-1997
		DE 3855778 T	07-08-1997
		US 4945339 A	31-07-1990
US 5519379 A	21-05-1996	AU 701891 B	11-02-1999
		AU 4819096 A	24-10-1996
		BR 9601304 A	13-01-1998
		CA 2170587 A	11-10-1996
		EP 0737948 A	16-10-1996
		JP 8293076 A	05-11-1996